



Zone-Flex 8

8mm x 1000mm x 1000mm

Zone-Flex 10

10mm x 1000mm x 1000mm


Applications: Commercial gyms and leisure centres, free weights and cross-fit areas. Provides shock absorption and impact sound reduction.

Dynamik advanced flooring solutions are designed to reduce impact sound transmission and vibration caused by free weights and cardio gym equipment. The result is a safe exercise space that causes minimal noise disturbance for adjacent spaces.

High performance adhesive free tiles with precise dovetail interlocking profile. Zone-Flex 8 and Zone-Flex 10 tiles offer enhanced shock absorption and a safe resilient platform for exercises. The premium vertical locking mechanism allows easy installation and complete flexibility. This interlocking floor system provides a totally adhesive free installation process, preventing contamination of the subfloor.

Principle Features

- **Adhesive free** - No adhesive contamination of the subfloor with vertical interlocking system.
- **Flexible** - Areas can be re-purposed at any time by simply disconnecting the tiles and refitting.
- **Acoustic Performance** - Excellent impact sound reduction.
- **Sustainable and Recyclable** - Manufactured using recycled rubber.
- **Healthy Environment** - Superfine compounds reduce absorption of dirt and make the cleaning process easier. Hygienic, SBR rubber is naturally anti-microbial, anti-allergy.

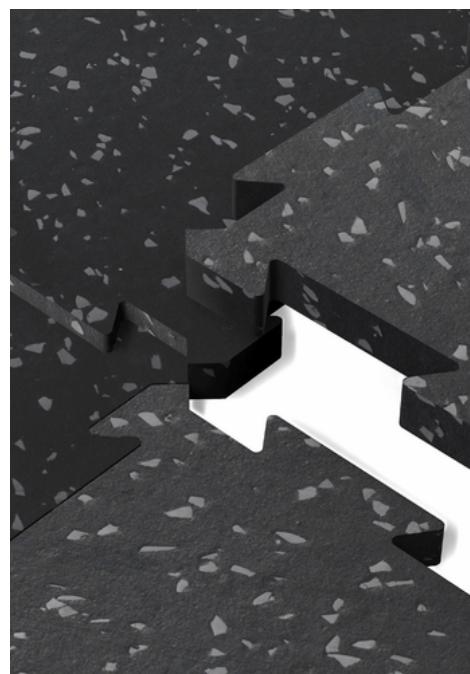

Data Sheet

Zone-Flex Interlocking Tiles

ECO-TEK
Sustainable Flooring Solutions

Product Benefits

- Adhesive free interlocking installation system with vertical disassembly.
- No adhesive contamination of the subfloor.
- Anti-fatigue, impact force resistant flooring.
- Provides a safe exercise platform, sound insulation and shock absorption from free weight activities.
- Gym flooring is made from recycled rubber from used vehicle tyres, preventing these materials from becoming waste and landfill.

Applications

- Commercial gyms.
- Spin rooms.
- Equipment isolation.
- Cross fit training areas.
- Yoga studios.

Zone-Flex Product Range

Thickness	Zone-Flex 8 - 8mm Zone-Flex 10 - 10mm
Dimensions	500mm x 500mm
Density	900 kg/m
Impact Sound Reduction	Zone-Flex 8 - 19dB Zone-Flex10 - 19dB

Further acoustic improvements can be achieved by combining with ISO-Flex multi-layer systems.

Colour Options

15% EPDM Coloured Flecks

Dark Grey Fleck

Blue Fleck

Light Grey Fleck

Red Fleck



 Sustainable

 Innovative

 Acoustic

 Flooring